

Electronic pressure switch with display

For sanitary applications

Model PSA-31

WIKA data sheet PE 81.85



Applications

- Food and beverage industry
- Pharmaceutical industry
- Filling and packing machinery
- Sanitary applications

Special features

- Easily-readable, robust display
- Intuitive and fast setup
- Easy and flexible mounting configurations



Pressure switch model PSA-31

Description

Award-winning in design and functionality

The successful design and the excellent functionality of the WIKA switch family were already confirmed by winning the "iF product design award 2009" for the PSD-30 pressure switch.

The robust LED display has been designed using 9 mm high characters (the largest possible) and with a slight incline in order to make reading the level as easy as possible from a long way off. A 14-segment display has been used, since it represents text very well.

The 3-key operation makes simple, intuitive menu navigation possible, with no need for additional assistance. The menu navigation is designed in accordance with the latest VDMA standard. The VDMA standard for fluid sensors (24574-1, part 1 - pressure switches) has the aim of simplifying the use of pressure switches by standardising menu navigation and display.

The control keys have been designed as large as possible and are arranged ergonomically to ensure fast and easy adjustments. Operation without any additional assistance is made easier through the tactile feedback.

Customised installation

The installation of the PSA-31 can be flexibly adapted to the individual mounting situation. Due to the almost unlimited rotation of the display and case by more than 300°, the display can be adjusted independently of the electrical connection. The display can thus always be aligned to face the operator, and the M12 x 1 connection positioned to suit the desired cable routing.

High quality

During development of the WIKA switch family a high value was placed on a robust design and the selection of appropriate materials suited to machine-building applications. For this reason the case and the threaded connection of the electrical connector are made from stainless steel. Overwinding or tearing off the connector is therefore virtually impossible.

Measuring ranges

Relative pressure								
bar	0 ... 1	0 ... 1.6	0 ... 2.5	0 ... 4	0 ... 6	0 ... 10	0 ... 16	0 ... 25
psi	0 ... 15	0 ... 25	0 ... 30 ¹⁾	0 ... 50	0 ... 100	0 ... 160	0 ... 200	0 ... 300

Absolute pressure								
bar	0 ... 1	0 ... 1.6	0 ... 2.5	0 ... 4	0 ... 6	0 ... 10	0 ... 16	0 ... 25
psi	0 ... 15	0 ... 25	0 ... 30 ¹⁾	0 ... 50	0 ... 100	0 ... 160	0 ... 200	0 ... 300

Vacuum and +/- measuring range								
bar	-1 ... 0	-1 ... +1.5	-1 ... +3	-1 ... +5	-1 ... +9	-1 ... +15	-1 ... +24	
psi	-14.5 ... 0	-14.5 ... +30	-14.5 ... +50	-14.5 ... +100	-14.5 ... +160	-14.5 ... +200	-14.5 ... +300	

The given measuring ranges are also available in kg/cm² and MPa.

Overpressure limit

2 times

Display

14-segment LED, red, 4-digit, 9 mm character size
Display can be turned electronically through 180°

Update

100, 200, 500, 1,000 ms (adjustable)

Output signals

Number of switching outputs: 1 or 2
Type of switching output: PNP or NPN¹⁾
Analogue signal: 4 ... 20 mA or DC 0 ... 10 V

¹⁾ With the IO-Link option, switching output 1 is always PNP.

Switching thresholds

Switch point 1 and switch point 2 are individually adjustable

Switching functions

Normally open, normally closed, window, hysteresis

Switching voltage

Power supply - 1 V

Switching current

- without IO-Link: max. 250 mA per switching output
- with IO-Link: max. 100 mA per switching output

Settling time

Switching output: ≤ 10 ms

Analogue signal: 3 ms

Zero offset adjustment

max. 3 % of span

Load

Analogue signal 4 ... 20 mA: ≤ 0.5 kΩ

Analogue signal DC 0 ... 10 V: > 10 kΩ

Voltage supply

Power supply

DC 15 ... 35 V

Current consumption

maximum 100 mA

Total current consumption

max. 600 mA including switching current

max. 450 mA including switching current (with IO-Link option)

Reference conditions

Temperature

15 ... 25 °C

Atmospheric pressure

950 ... 1,050 mbar

Humidity

45 ... 75 % relative

Nominal position

Process connection lower mount (LM)

Power supply

DC 24 V

Load

see "output signals"

Accuracy data

Accuracy of the analogue signal

≤ ±1.0 % of span

Including non-linearity, hysteresis, zero offset and end value deviation (corresponds to measured error per IEC 61298-2). Calibrated in vertical mounting position with process connection facing downwards.

Non-linearity

≤ ±0.5 % of span BFSL (per IEC 61298-2)

Adjustment accuracy of the switch points

≤ ±0.5 % of span

Display

≤ ±1.0 % of span ±1 digit

Long-term drift

≤ ±0.2 % of span (per IEC 61298-2)

Typical temperature coefficient of zero point

- Clamp DIN 32676, DN 32
 - 0 ... 20 °C: 0.75 % of span/10 K
 - 20 ... 80 °C: 0.45 % of span/10 K
- All other process connections
 - 0 ... 20 °C: 0.7 % of span/10 K
 - 20 ... 80 °C: 0.2 % of span/10 K

Typical temperature coefficient of span

All process connections

0 ... 80 °C: 0.1 % of span/10 K

Process connections

Designation	Thread size
Hygienic	G 1, flush ¹⁾²⁾
Grooved union nut DIN 11851 with conical coupling ³⁾	DN 40 DN 50
Tri-clamp	1 ½" 2"
Clamp DIN 32676	DN 32 DN 40 DN 50

1) Sealing from EPDM or FKM

2) Suitable for WIKA adapter system model 910.61; see data sheet AC 09.20

3) For a 3-A conform connection of process connections with milk thread fittings per DIN 11851, profile sealings from SKS Komponenten BV or Kieselmann GmbH have to be used.

Other connections on request

Operating conditions

Permissible temperature ranges

Ambient: -20 ... +80 °C

Storage: -20 ... +80 °C

Rated temperature range: 0 ... 80 °C

Medium temperature depending on the process connection

- G1 hygienic
 - 20 ... +125 °C (+150 °C possible for up to 60 minutes)
- All other process connections
 - 20 ... +100 °C (+135 °C possible for up to 60 minutes)

Humidity

45 ... 75 % relative

Ingress protection

IP 65 and IP 67

The stated ingress protection (per IEC 60529) only applies when plugged in using mating connectors that have the appropriate ingress protection.

Vibration resistance

10 g (IEC 60068-2-27, vibration under resonance)

Shock resistance

50 g (per IEC 60068-2-6, mechanical shock)

Electrical connections

Connections



- Circular connector M12 x 1, 4-pin
- Circular connector M12 x 1, 5-pin ¹⁾

1) Only for version with two switching outputs and analogue signal

Electrical safety

Overvoltage protection: DC 40 V
Short-circuit resistance: S₊ / SP1 / SP2 vs. U-
Reverse polarity protection: U₊ vs. U-
Insulation voltage: DC 500 V

Connection diagram

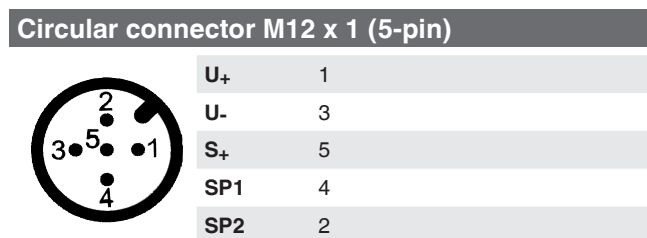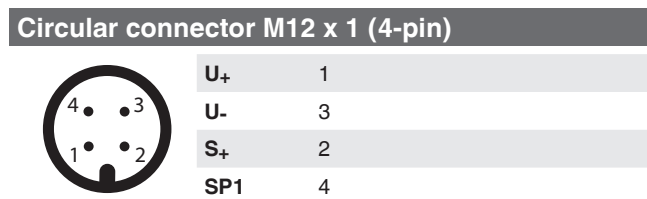

Legend:

U₊ Positive power supply
U₋ Negative power supply
S₊ Analogue output
SP1 Switching output 1
SP2 Switching output 2

Materials

Wetted parts

Process connection: Stainless steel 1.4435 / 316L

Non-wetted parts

Case: Stainless steel 304
Keyboard: TPE-E
Display window: PC
Display head: PC+ABS-Blend

Pressure transmission medium

KN 92 medicinal white mineral oil, FDA conform per CFR 172.878 and 21 CFR 178.3620(a); conform to USP, EP and JP

CE conformity

EMC directive

2004/108/EC, EN 61326 emission (group 1, class B) and interference immunity (industrial application)

RoHS conformity

Yes

Approvals

- **GOST-R**, import certificate, Russia
- **3-A**, food, USA

This instrument is 3-A marked based on a third party verification for conformance to the 3-A standard 74-05.

Certificates

- Material certificate per EN 10204-3.1
- Confirmation of the class and indication accuracy
- FDA conformity
- Manufacturer's declaration regarding EU regulation 1935/2004 EC


Others on request

Approvals and certificates, see website

Dimensions in mm


Pressure switch

with clamp

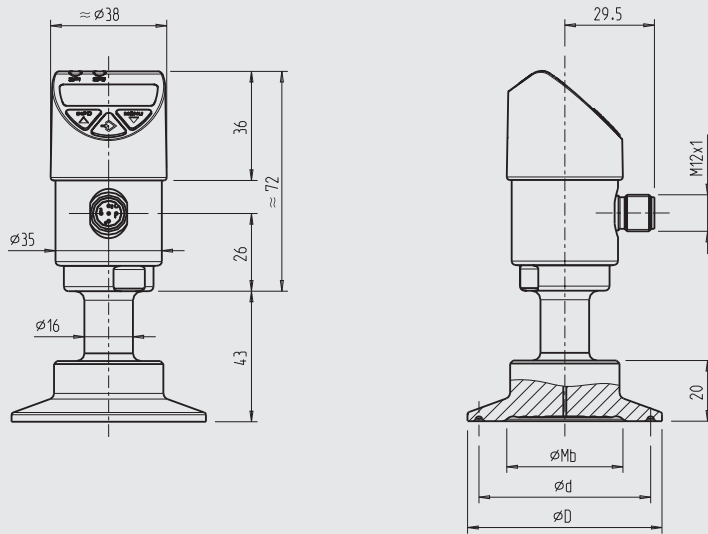


Design		Dimensions in mm		
		ØMb	Ød	ØD
DIN 32676	DN 32	29	43.5	50.5
	DN 40	32	43.5	50.5
	DN 50	40	56.6	64
Tri-clamp	1 1/2"	32	43.5	50.5
	2"	40	56.6	64

with grooved union nut DIN 11851

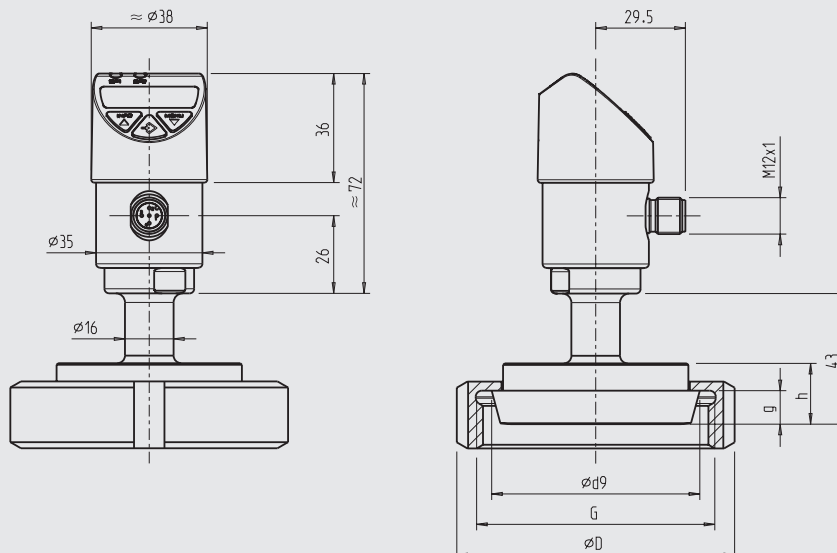

Design		Dimensions in mm				
		Ød9	G	ØD	g	h
DIN 11851	DN 40	56	Rd 65 x 1/6	78	10	20
	DN 50	68.5	Rd 78 x 1/6	92	11	20

with G1 hygienic

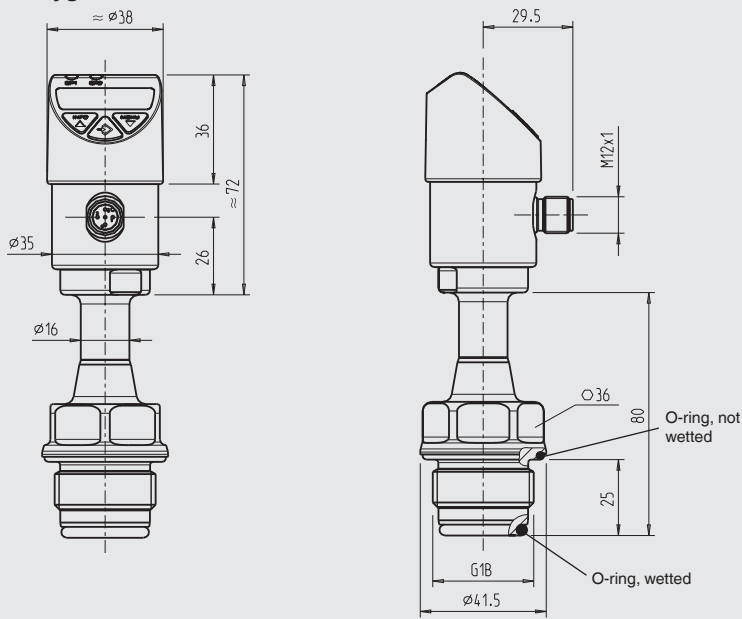

For dimensions of the appropriate process adapters and welding sockets see data sheet AC 09.20

Accessories and spare parts

Sealings for G1 hygienic, wetted

Dimensions: 21.82 x 3.53 mm

Material	Colour	Temperature range	Conformity to	Order no.
EPDM 70	black	-40 ... +145 °C	FDA 21 CFR 177.2600, USP XXV class VI and 3-A (18-03) sanitary standards class 2 (max. 8 % milk fat)	14004173
FKM 75	black	-15 ... +200 °C	FDA 21 CFR 177.2600, USP XXIII class VI and 3-A (18-03) sanitary standards class 1	14004174

Sealings for G1 hygienic, not wetted

Dimensions: 35 x 2.5 mm

Material	Colour	Temperature range	Conformity to	Order no.
EPDM 70	black	-40 ... +145 °C	-	14023833

Ordering information

Model / Measuring range / Number of switching outputs / Type of switching output / Analogue signal / Process connection / Certificates

© 2011 WIKA Alexander Wiegand SE & Co. KG, all rights reserved.
The specifications given in this document represent the state of engineering at the time of publishing.
We reserve the right to make modifications to the specifications and materials.



WIKAL Alexander Wiegand SE & Co. KG
Alexander-Wiegand-Straße 30
63911 Klingenberg/Germany
Tel. (+49) 9372/132-0
Fax (+49) 9372/132-406
E-mail info@wika.de
www.wika.de